



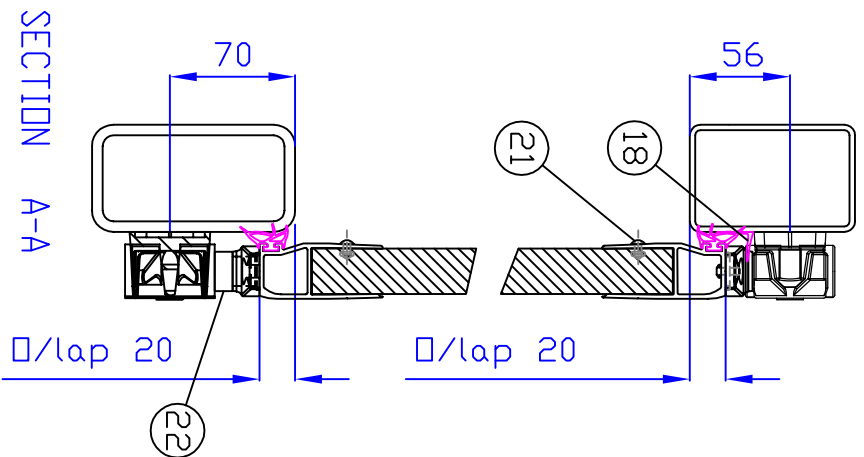

Notes:
- 2nd Lockrod on each door optional.
- Min Door Height 2701mm.
- Max Door Height 3000mm

No.	DESCRIPTION
1	HINGE PROFILE I3066.3000.670
2	HINGE BLADE I3070.77
3	FRAME CAPPING I3067.5000 OR I3067.5500
4	CENTRE SEAL I3069.5600
6	EPDM PERIMETER SEAL 56CS001
7	I2MM PLATED STEEL RODS - INSIDE HINGE PROFILES SL3A12
8	20MM NYLON TOP HAT BUSHES SL3B
9	SS ROLL PINS, TOP/BOTTOM HINGES ONLY SL3RP22
10	"O" RING FOR TOP PLATES. (I6.6 ID X 2.4mm) SL3OR
11	NORMANTON HANDLE RETAINER SL3NR1
12	NORMANTON HANDLE SL3NH1
13	NORMANTON KEEPER SL3 NK1
14	NORMANTON CAM SL3NC1
15	NORMANTON HEAVY DUTY PLATE SL304FD001
16	I6MM PLATED STEEL LOCKROD 23.445I0
17	HINGE BRACKET SL304FD002 & M12 X I20 Z/P BOLT/LOCKNUT
18	RAINGUARD CO EXTRUSION RG01
19	6.4 AUTOBULBS OR EQUIV (M7 FOR PLATES)
20	POP RIVETS (All I4.8 X I6mm OR EQUIV)
21	6.4 AUTOBULB OR EQUIV (M3 FOR FRAME)
22	SPACER SLEEVE, STD LENGTH I0MM (OPTIONAL/AS SPECIFIED)

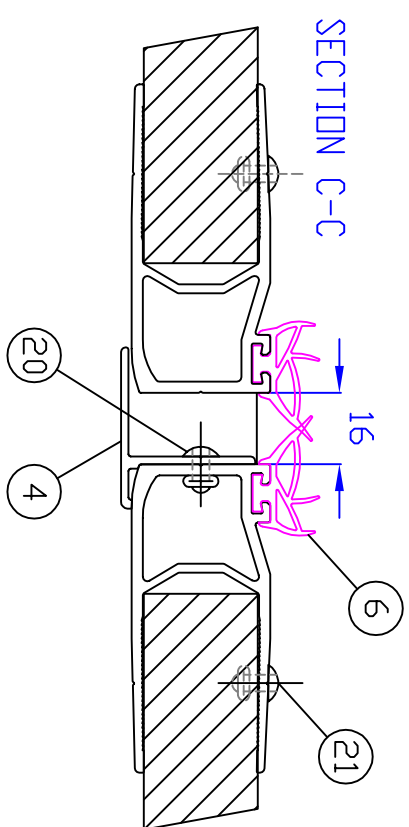