

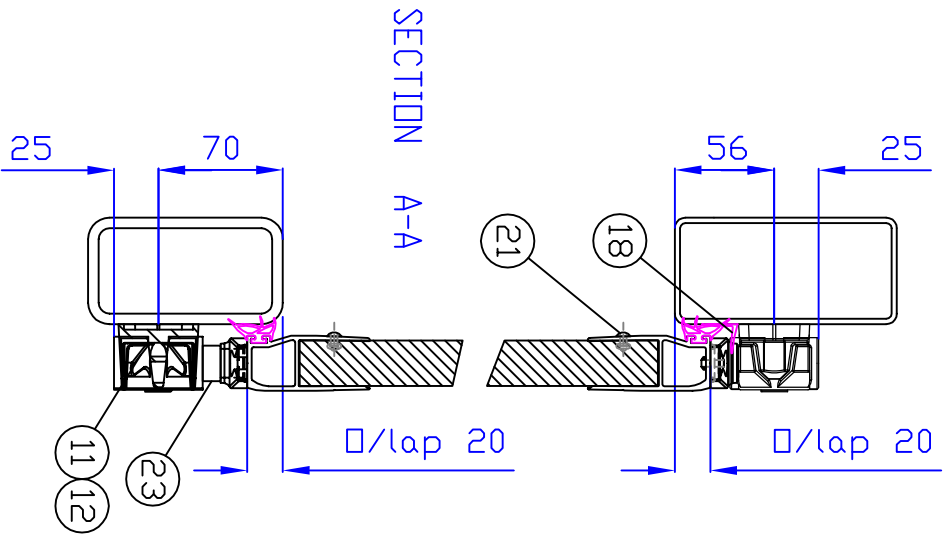
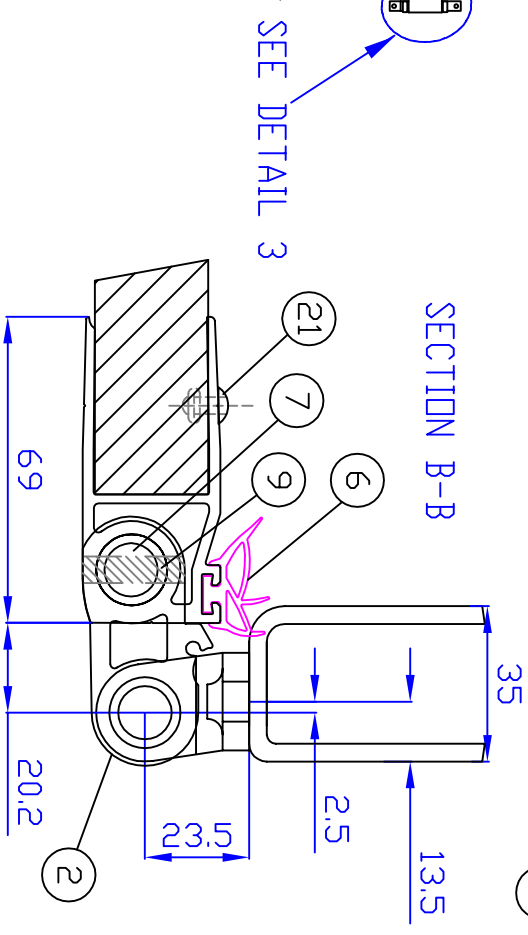
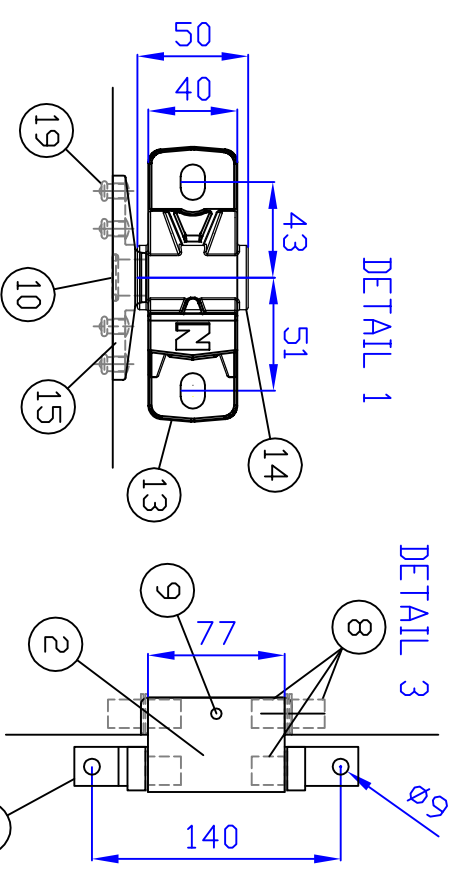
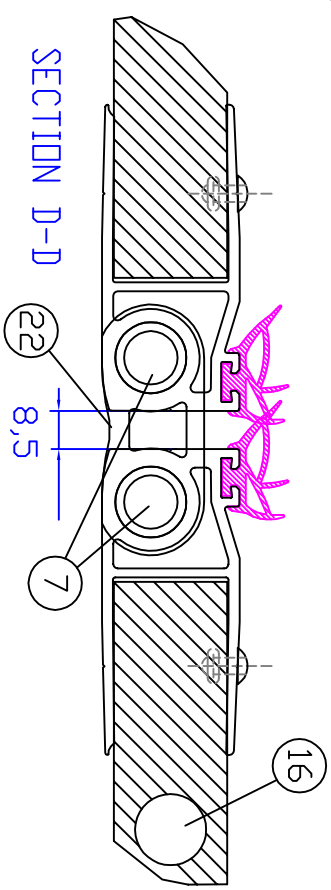
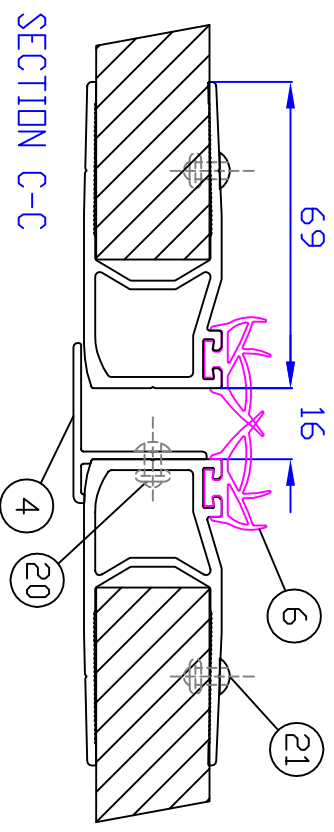


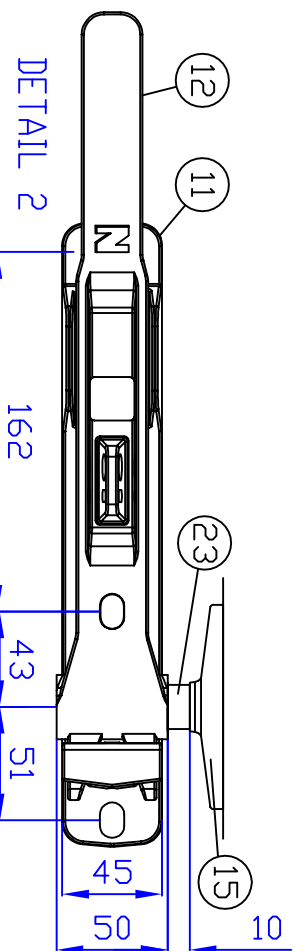

Notes:

- Lockrod on outer leaf same position relative to door edge
- Door Height, min 2701, max 3000, to suit Aperture Ht (Std = AH+40)
- Equal door widths to suit overall frame width

NO.	DESCRIPTION
1	HINGE PROFILE I3066, 3000, 770
2	HINGE BLADE I3070, 77
3	FRAME CAPPING I3067, 5000 OR I3067, 5500
4	CENTRE SEAL I3069, 5600
5	EPDM PERIMETER SEAL 56CS001
6	I2MM PLATED STEEL RODS - INSIDE HINGE PROFILES SL3A12
7	20MM NYLON TOP HAT BUSHES SL3B
8	SS ROLL PINS, TOP/BOTTOM HINGES ONLY SL3RP22
9	"O" RING FOR TOP PLATES, (I6,6 ID X 2,4MM) SL3OR
10	NORMANTON HANDLE RETAINER SL3NR1
11	NORMANTON HANDLE SL3NH
12	NORMANTON KEEPER SL3 NK1
13	NORMANTON CAM SL3NC1
14	NORMANTON HEAVY DUTY PLATE SL304FD001
15	I6MM PLATED STEEL LOCKROD 23, 44510
16	HINGE BRACKET SL304FD002 & M12 X I20 Z/P BOLT/LOCKNUT
17	RAINGUARD CO EXTRUSION RG01
18	6,4 AUTOBULBS OR EQUIV (M7 FOR PLATES)
19	6,4 AUTOBULB OR EQUIV (M3 FOR FRAME)
20	DOUBLE HINGE BLADE I7349, 77
21	SPACER SLEEVE, STD LENGTH 10MM (OPTIONAL/AS SPECIFIED)

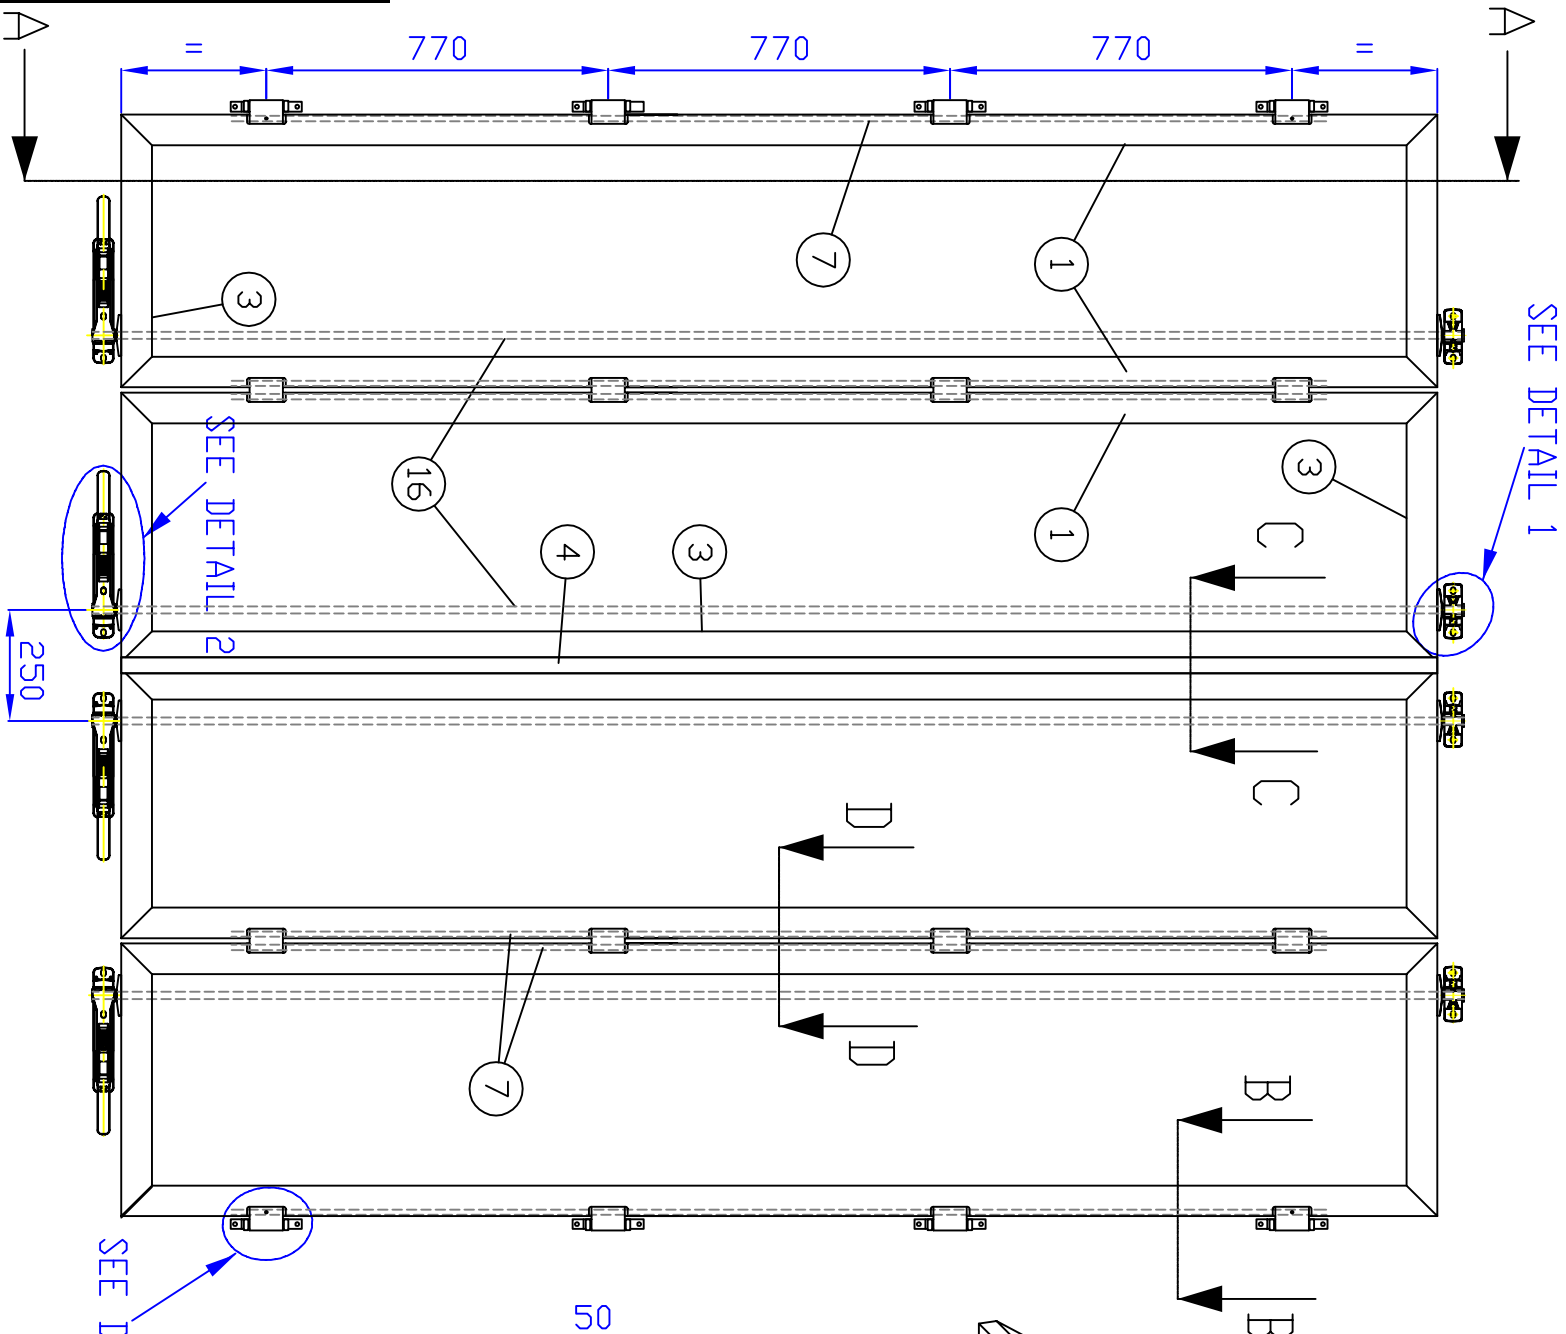

THIS DOCUMENT AND THE COPYRIGHT THEREOF ARE THE PROPERTY OF NORMANTON LAMINATING SERVICES LTD AND MAY NOT BE USED COPIED OR DISCLOSED TO ANY THIRD PARTY WITHOUT WRITTEN AUTHORISATION.