

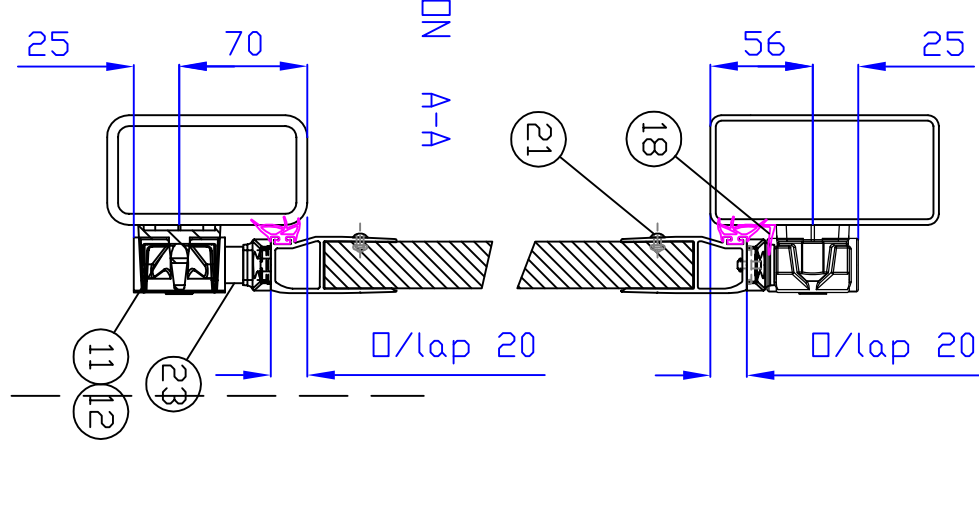
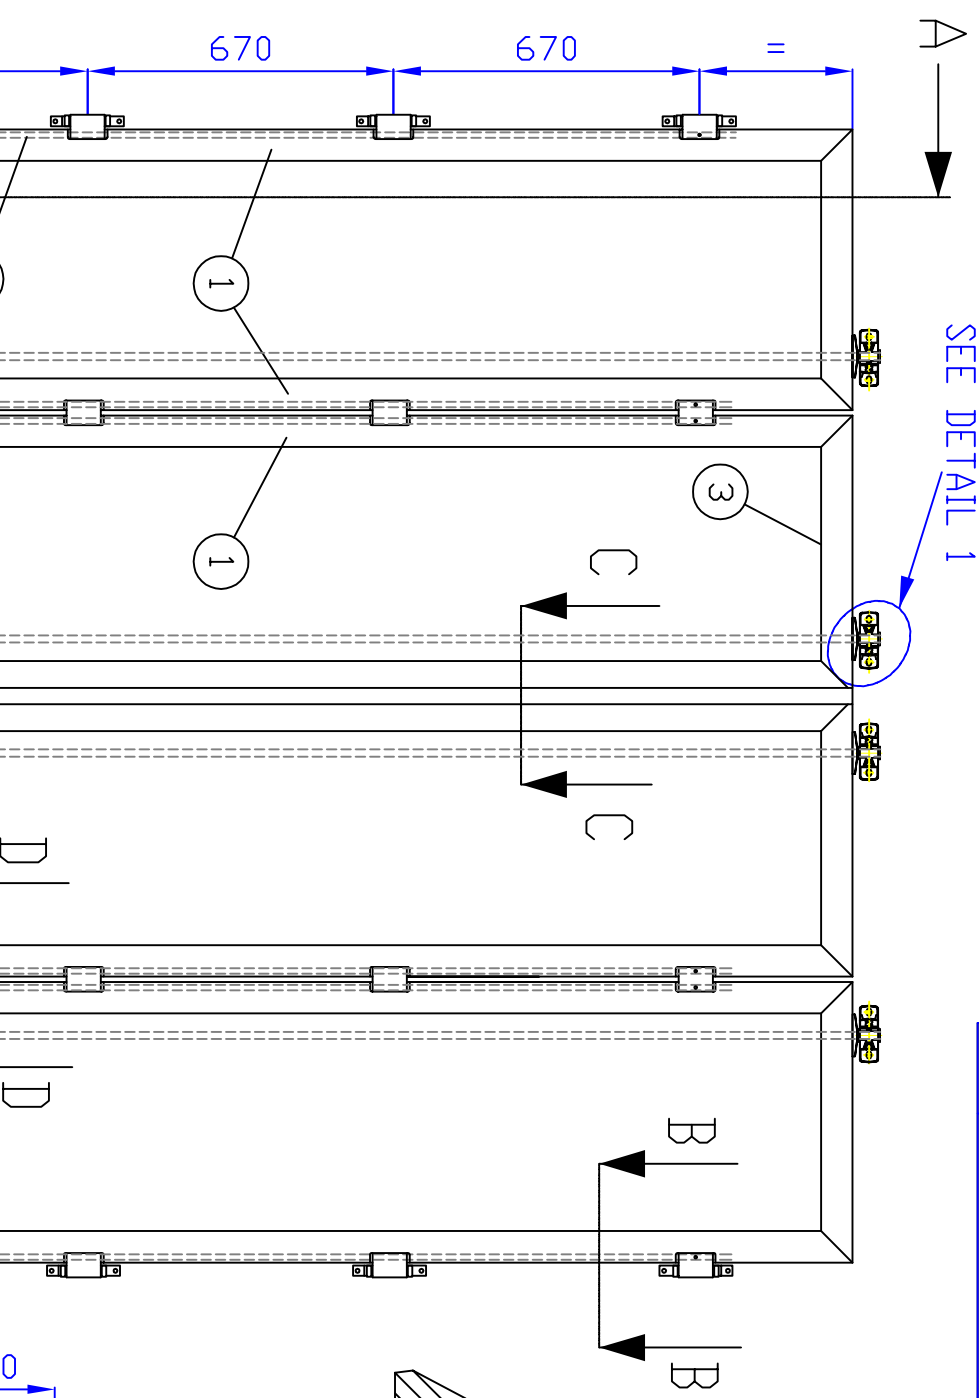
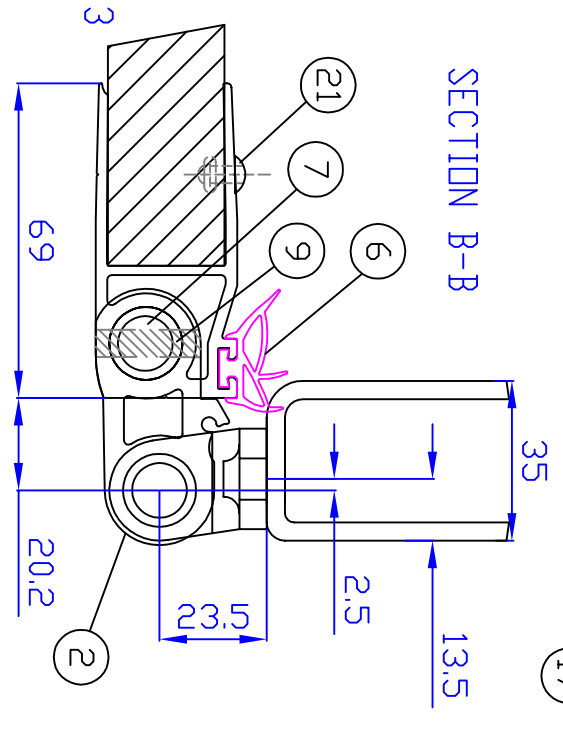
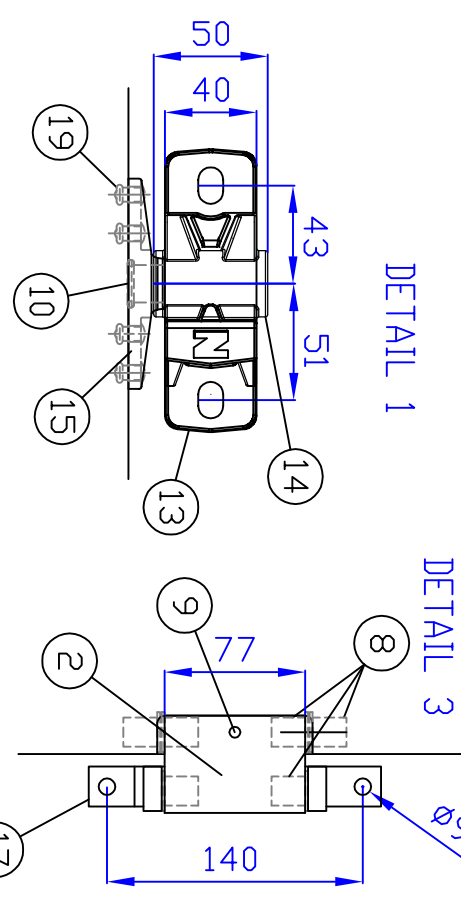


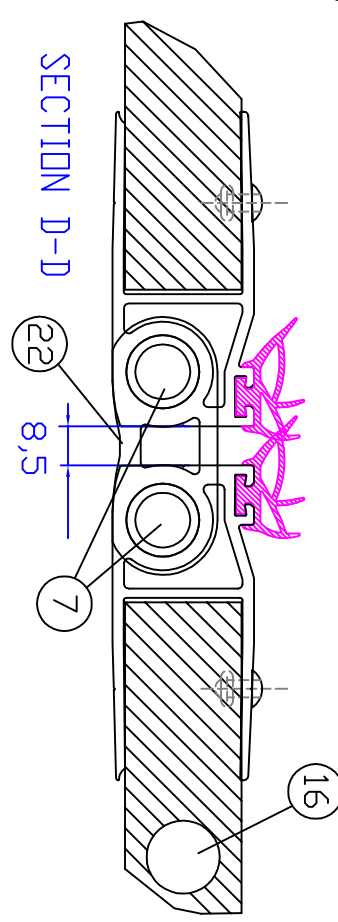

Notes:
= Lockrod on outer leaf same position relative to door edge
- Door Height, min 3001, max 3350 to suit Aperture Ht (Std = AH+40)
- Equal door widths to suit overall frame width

No.	DESCRIPTION
1	HINGE PROFILE 13066.3350.670
2	HINGE BLADE 13070.77
3	FRAME CARPING 13067.5000 OR 13067.5500
4	CENTRE SEAL 13069.5600
6	EPDM PERIMETER SEAL 56CS001
7	12MM PLATED STEEL RODS - INSIDE HINGE PROFILES SL3A12
8	20MM NYLON TOP HAT BUSHES SL3B
9	SS ROLL PINS, TOP/BOTTOM HINGES ONLY SL3RP22
10	"O" RING FOR TOP PLATES. (16.6 ID x 2.4mm) SL3DR
11	NORMANTON HANDLE RETAINER SL3NRI
12	NORMANTON HANDLE SL3NHI
13	NORMANTON KEEPER SL3 NKI
14	NORMANTON CAM SL3NCI
15	NORMANTON HEAVY DUTY PLATE SL304FD001
16	16MM PLATED STEEL LOCKROD 23.44510
17	HINGE BRACKET SL304FD002 8 M12 x 120 Z/P BOLT/LOCKNUT
18	RAINGUARD CO EXTRUSION RG01
19	6.4 AUTOBULBS OR EQUIV (M7 FOR PLATES)
20	POP RIVETS (SEALED ALI 4.8 x 13mm OR EQUIV)
21	6.4 AUTOBULB OR EQUIV (M3 FOR FRAME)
22	DOUBLE HINGE BLADE 17349.77
23	SPACER SLEEVE, STD LENGTH 10MM (OPTIONAL/LAS SPECIFIED)

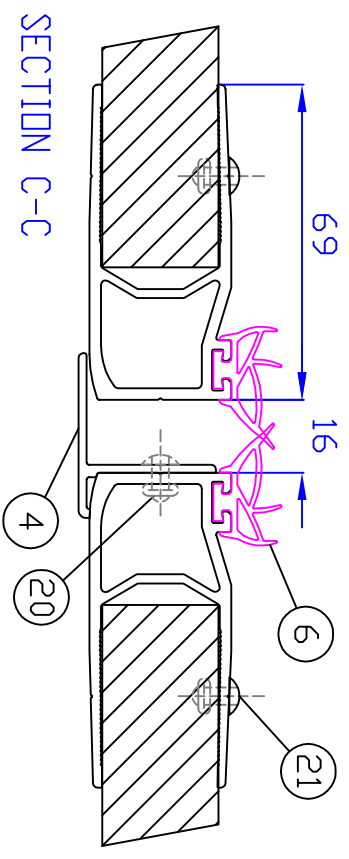