

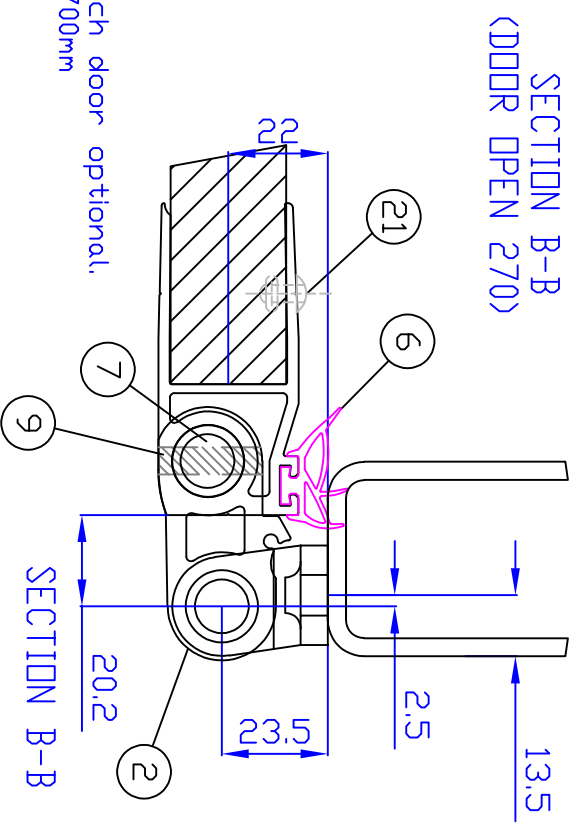
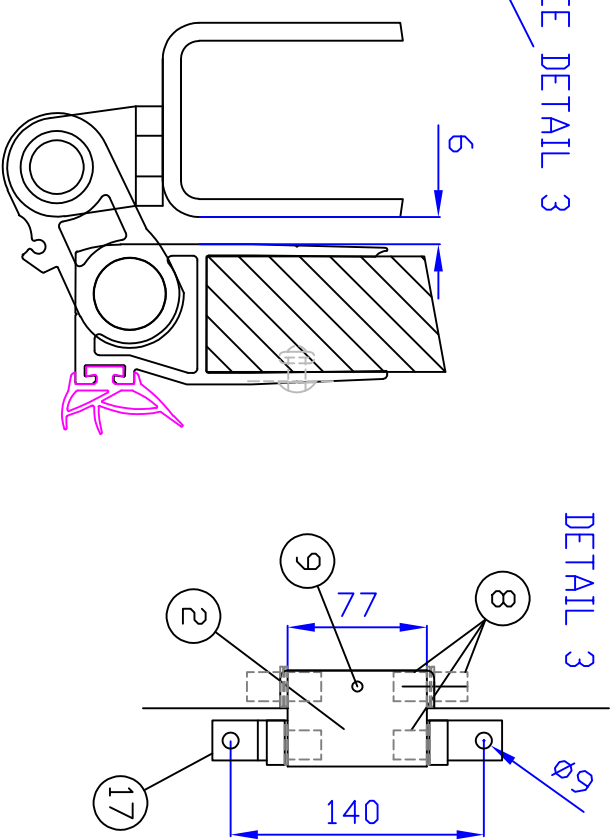
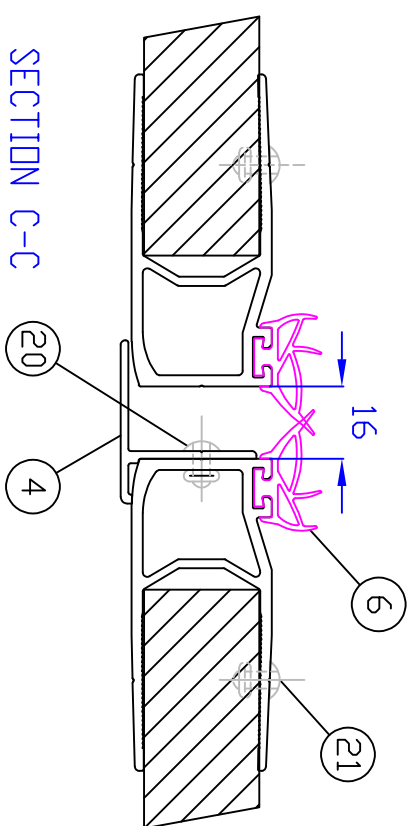
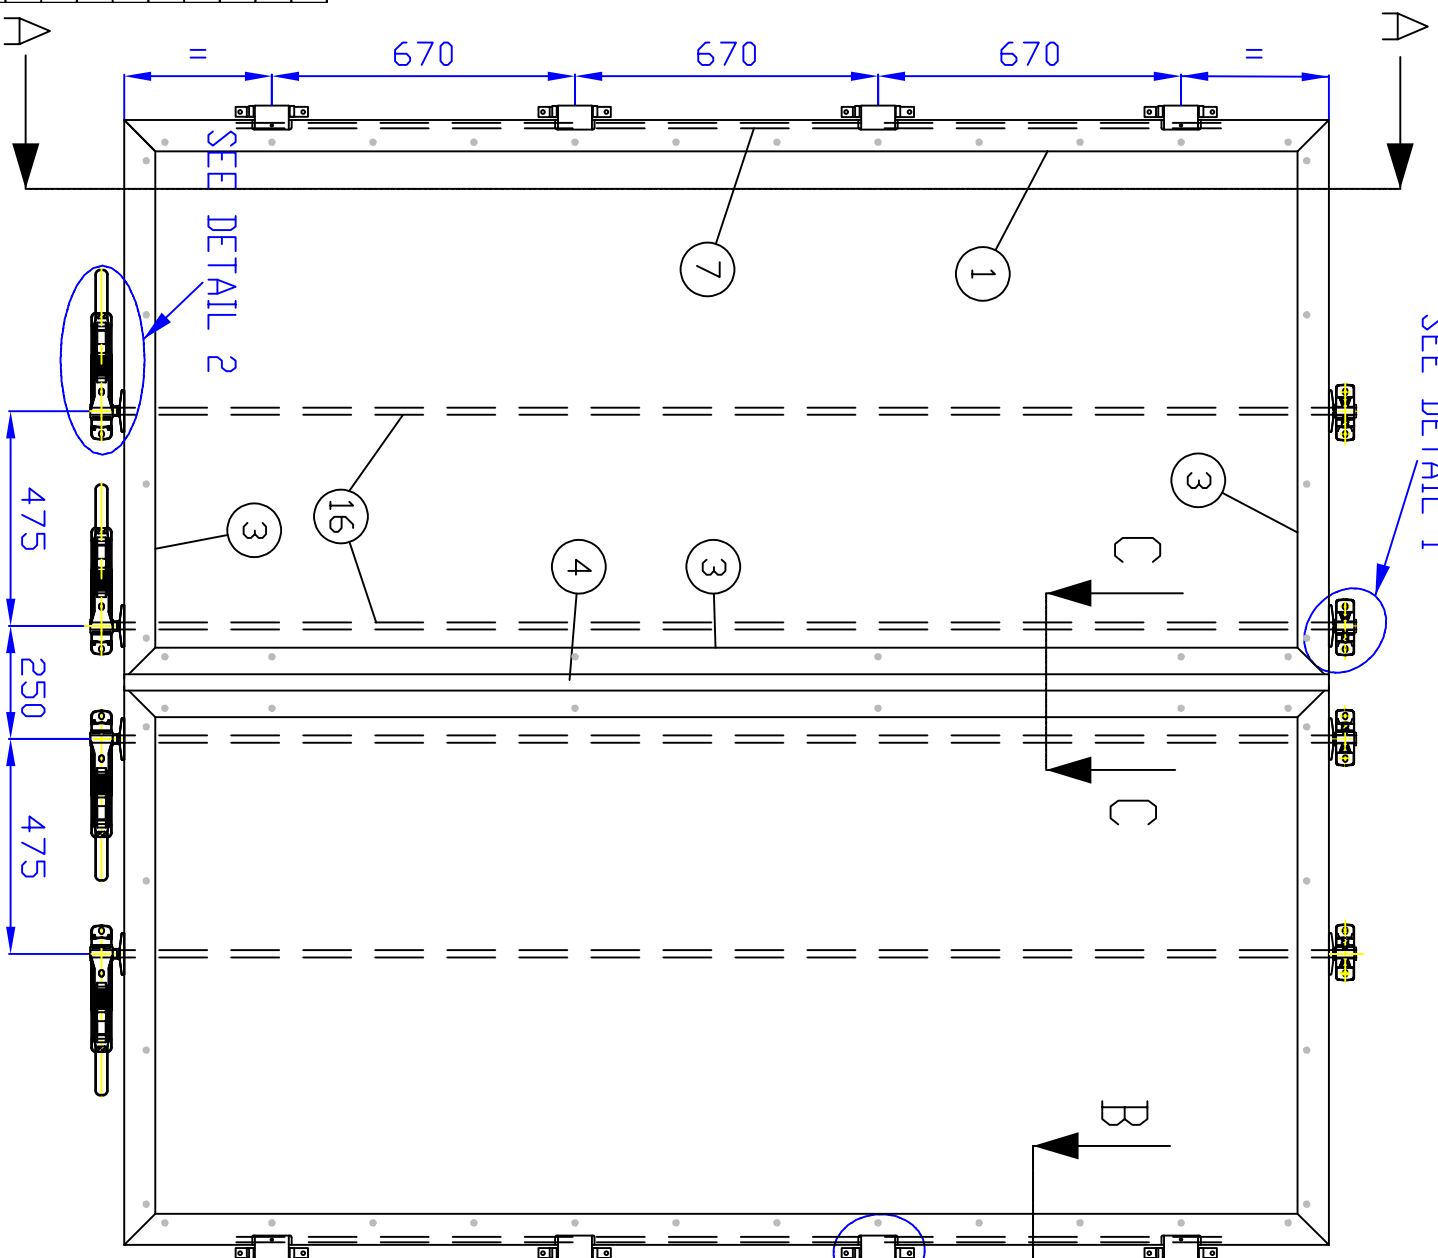


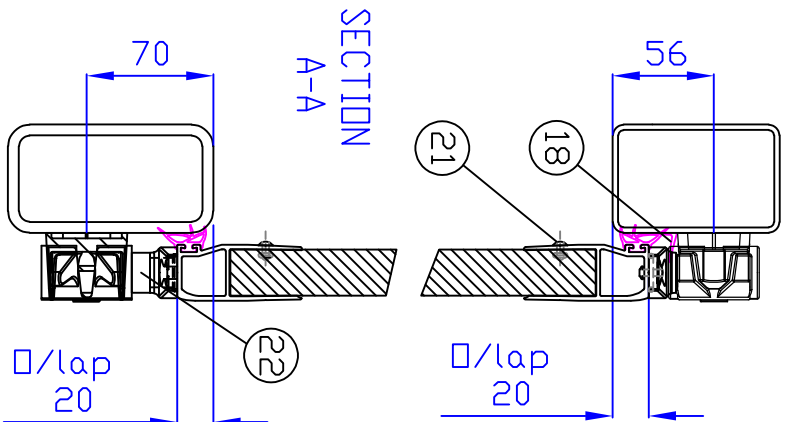

Notes:
- 2nd Lockrod on each door optional.
- Max Door Height 2700mm

No.	DESCRIPTION
1	HINGE PROFILE 13066, 2700, 670
2	HINGE BLADE 13070, 77
3	FRAME CAPPING 13067, 5000 OR 13067, 5500
4	CENTRE SEAL 13069, 5600
6	EPDM PERIMETER SEAL 56CS001
7	12MM PLATED STEEL RODS - INSIDE HINGE PROFILES SL3A12
8	20MM NYLON TOP HAT BUSHES SL3B
9	SS ROLL PINS, TOP/BOTTOM HINGES ONLY SL3RP22
10	"O" RING FOR TOP PLATES, (16.6 ID x 2.4mm) SL3OR
11	NORMANTON HANDLE RETAINER SL3NR1
12	NORMANTON HANDLE SL3NH
13	NORMANTON KEEPER SL3 NK1
14	NORMANTON CAM SL3NC1
15	NORMANTON HEAVY DUTY PLATE SL304FD001
16	16MM PLATED STEEL LOCKROD 23, 44, 510
17	HINGE BRACKET SL304FD002 & M12 x 120 Z/P BOLT/LOCKNUT
18	RAINGUARD CO EXTRUSION RG01
19	6.4, AUTOBULBS OR EQUIV (M7 FOR PLATES)
20	POP RIVETS (ALI 4, 8 x 16mm OR EQUIV)
21	6.4, AUTOBULB OR EQUIV (M3 FOR FRAME)
22	SPACER SLEEVE, STD LENGTH 10mm (OPTIONAL/AS SPECIFIED)

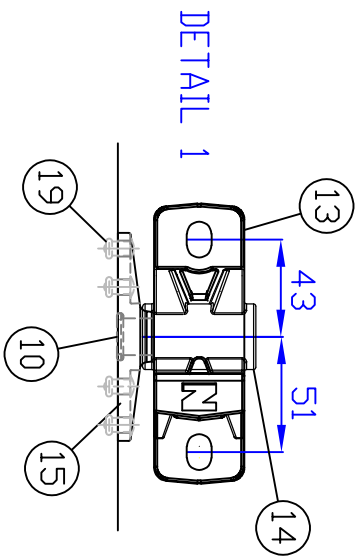